




FCC Part 15B Measurement and Test Report

For

GlobTek, Inc.

186 Veterans Dr. Northvale, NJ 07647 USA

Test Standards:	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Power Supply</u>
Tested Model:	<u>GT-93020-0324</u>
Report No.:	<u>STR13038481E-3</u>
Tested Date:	<u>2013-03-04 to 2013-03-26</u>
Issued Date:	<u>2013-03-26</u>
Tested By:	<u>Vigoss Xiong / Engineer</u> 
Reviewed By:	<u>Lahm Peng / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> 
Prepared By:	

SEM.Test Compliance Service Co., Ltd
3/F, Jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3
1.2 TEST STANDARDS.....4
1.3 TEST METHODOLOGY4
1.4 TEST FACILITY4
1.5 EUT SETUP AND OPERATION MODE5

2. SUMMARY OF TEST RESULTS6

3. §15.107 (A) CONDUCTED EMISSIONS7
3.1 MEASUREMENT UNCERTAINTY7
3.2 TEST EQUIPMENT LIST AND DETAILS7
3.3 TEST PROCEDURE.....7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7
3.5 ENVIRONMENTAL CONDITIONS8
3.6 SUMMARY OF TEST RESULTS/PLOTS8
3.7 CONDUCTED EMISSIONS TEST DATA.....8

4. §15.109(A)- RADIATED EMISSION11
4.1 MEASUREMENT UNCERTAINTY11
4.2 TEST EQUIPMENT LIST AND DETAILS11
4.3 TEST PROCEDURE.....11
4.4 TEST RECEIVER SETUP12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION12
4.6 ENVIRONMENTAL CONDITIONS12
4.7 SUMMARY OF TEST RESULTS/PLOTS12

EXHIBIT 1- PRODUCT LABELING15
PROPOSED FCC LABEL FORMAT15
PROPOSED LABEL LOCATION ON EUT15

EXHIBIT 2 - EUT PHOTOGRAPHS.....16

EXHIBIT 3 - TEST SETUP PHOTOGRAPHS.....19

EXHIBIT 4 - USERS MANUAL.....20

SEM. Test Compliance

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: GlobTek, Inc.
 Address of applicant: 186 Veterans Dr. Northvale, NJ 07647 USA
 Manufacturer: 1.GlobTek, Inc.
 2.GlobTek (Suzhou) Co., Ltd
 Address of applicant: 1.186 Veterans Dr. Northvale, NJ 07647 USA
 2.Building 4, No. 76, Jin Ling East Rd., Suzhou Industrial Park, Suzhou, JiangSu 215021, China

General Description of EUT	
Product Name:	Power Supply
Trade Name:	GlobTek
Model No.:	GT-93020-0324
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Input: AC 16-34, Output: AC 24V
Rated Current:	0.125A
Rated Power:	/
Power Adapter Model:	/
Highest Internal Frequency:	/

1.2 Test Standards

The following report is prepared on behalf of the GlobTek, Inc. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Full Load	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
AC Cable	1.5	Unshielded	Without Core
DC Cable	0.24	Unshielded	With Core

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107 (a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

N/A: not applicable

SEM. Test Compliance

3. §15.107 (a) CONDUCTED EMISSIONS

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2012-03-28	2013-03-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2012-03-28	2013-03-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2012-03-28	2013-03-27

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

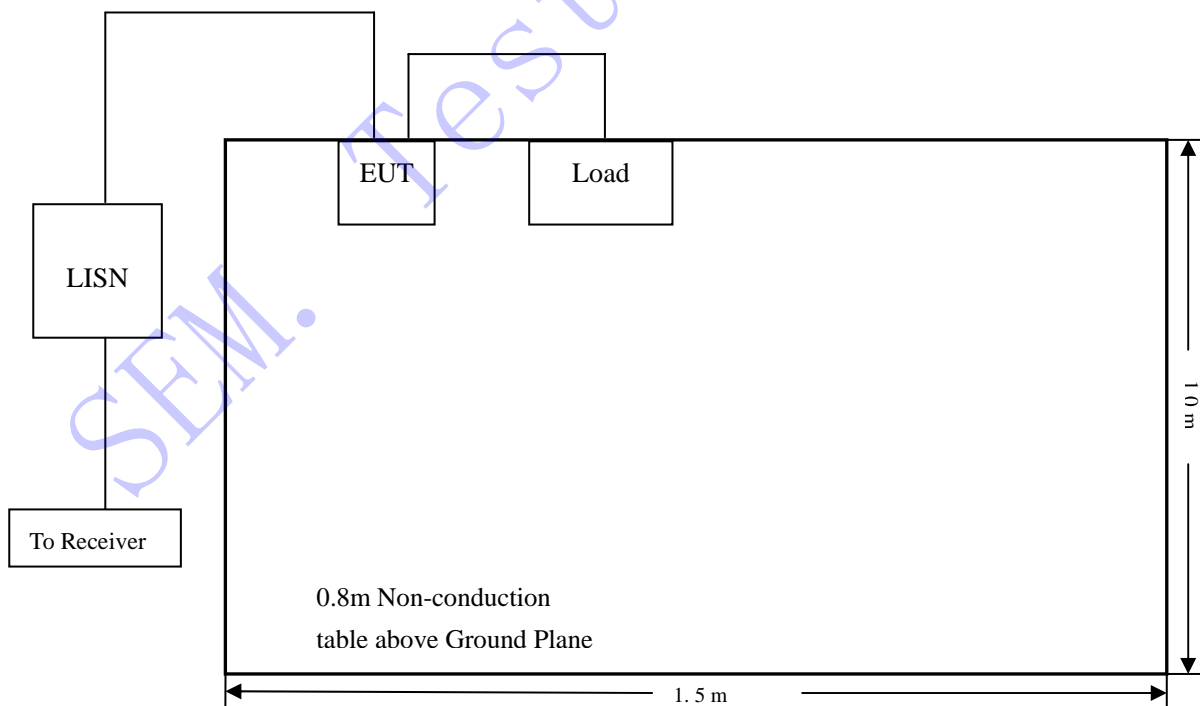

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

-15.58 dB μ V at 0.182 MHz in the Line, Peak detector, 0.15-30MHz


3.7 Conducted Emissions Test Data

SEM. Test Compliance

Plot of Conducted Emissions Test Data


EUT: Power Supply
 Tested Model: GT-93020-0324
 Operating Condition: Full Load
 Comment: Connected to Load

Test Specification: Line

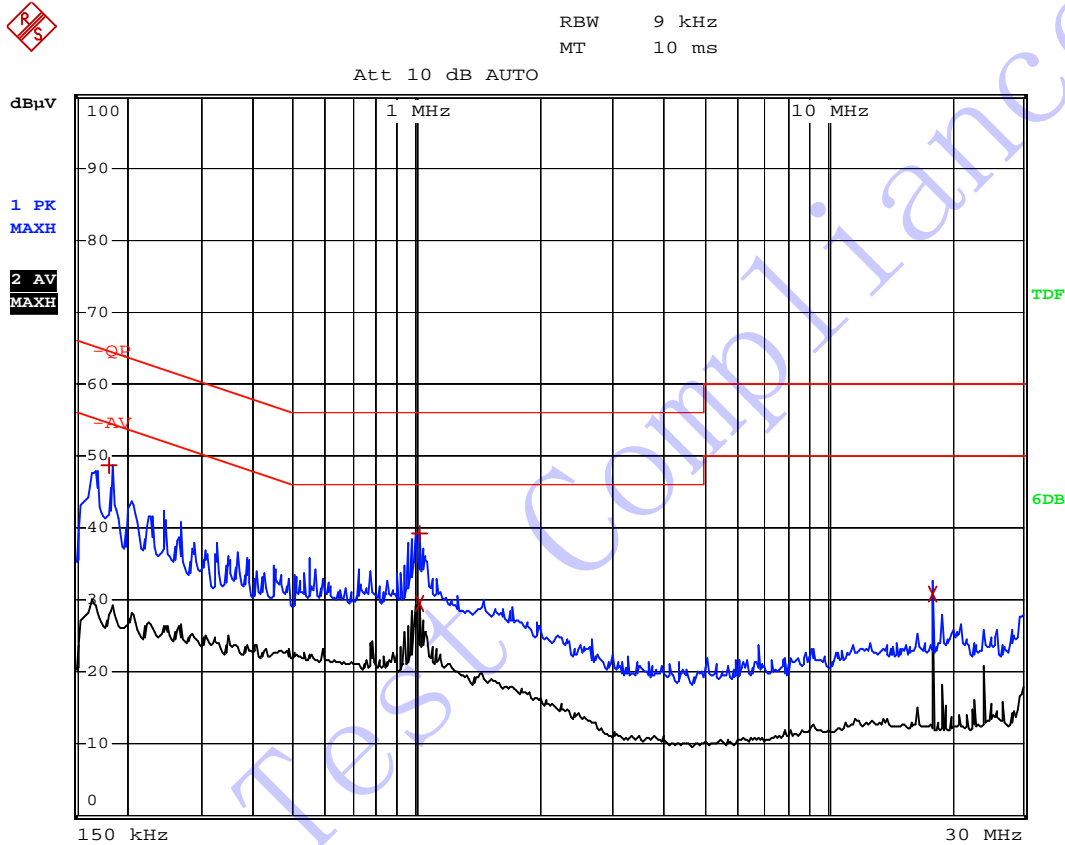

EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Max Peak	182 kHz	48.80	-15.58
1	Max Peak	1.014 MHz	39.35	-16.64
2	Average	1.014 MHz	29.43	-16.56
2	Average	17.986 MHz	30.72	-19.27

Test Specification: Neutral

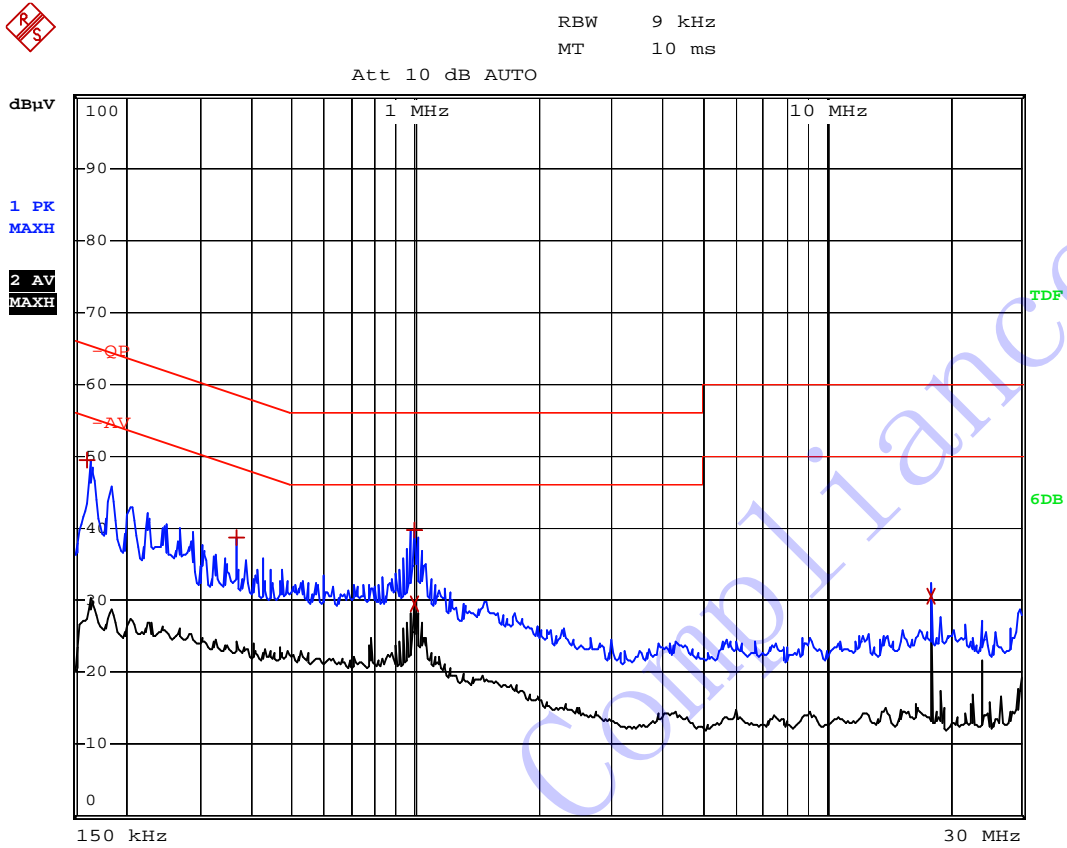

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	162 kHz	49.42	-15.93
1 Max Peak	366 kHz	38.76	-19.82
1 Max Peak	994 kHz	39.71	-16.28
2 Average	994 kHz	29.45	-16.55
2 Average	17.986 MHz	30.62	-19.37

4. §15.109(a)- RADIATED EMISSION

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-02-25	2014-02-24
Horn Antenna	ETS	3117	00086197	2013-02-25	2014-02-24

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

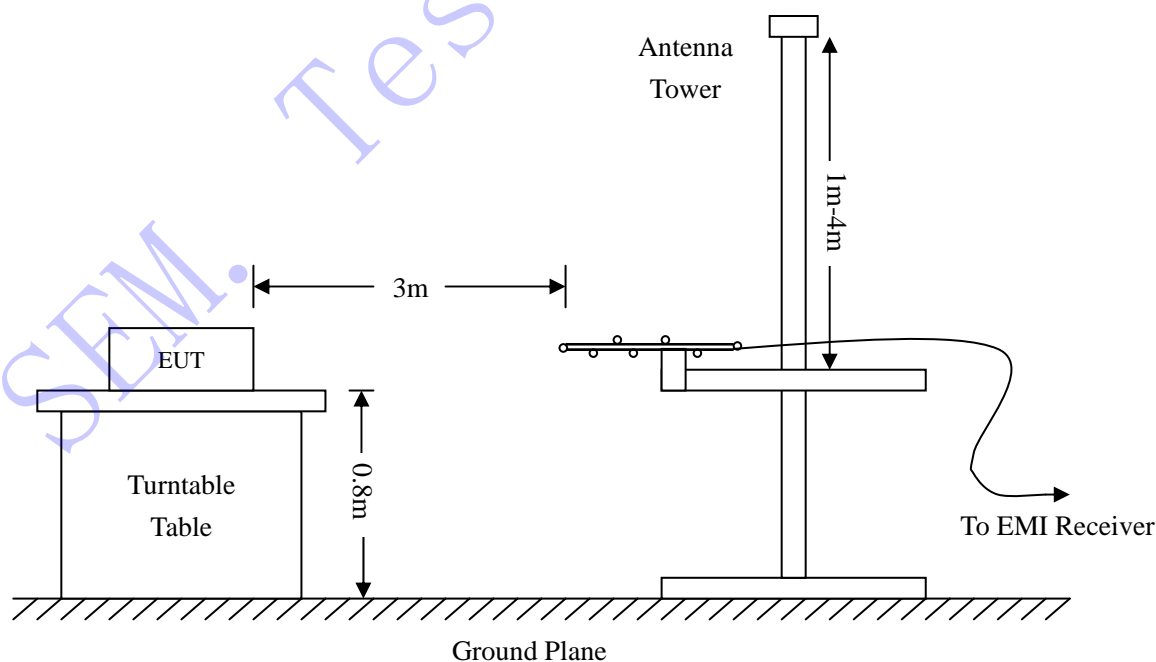

4.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-7.83 dBμV at 39.7147 MHz in the Vertical polarization, 30 MHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: Power Supply
 Tested Model: GT-93020-0324
 Operating Condition: Full Load
 Comment: Connected to Load

 Test Specification: Horizontal

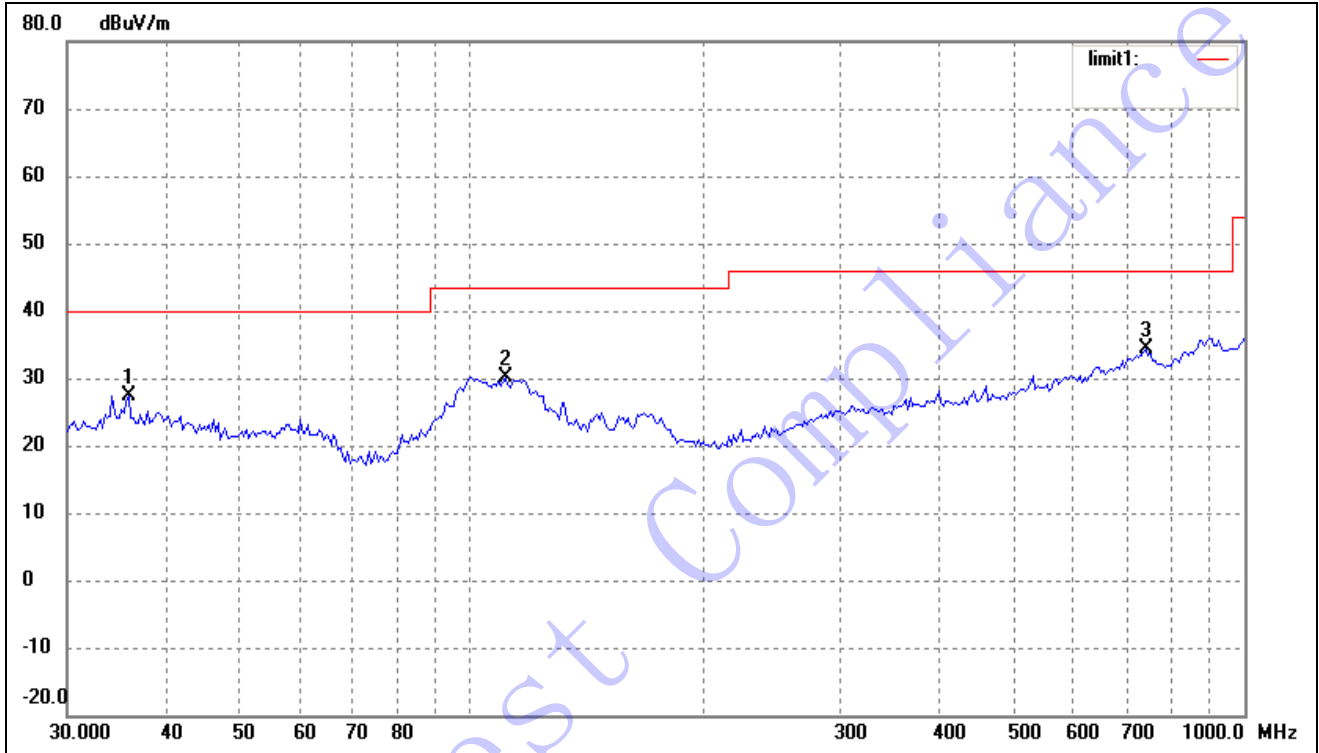

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.0007	18.30	9.04	27.34	40.00	-12.66	270	100	peak
2	110.5687	24.38	5.80	30.18	43.50	-13.32	180	100	peak
3	744.8661	16.45	17.94	34.39	46.00	-11.61	90	100	peak

Test Specification: Vertical

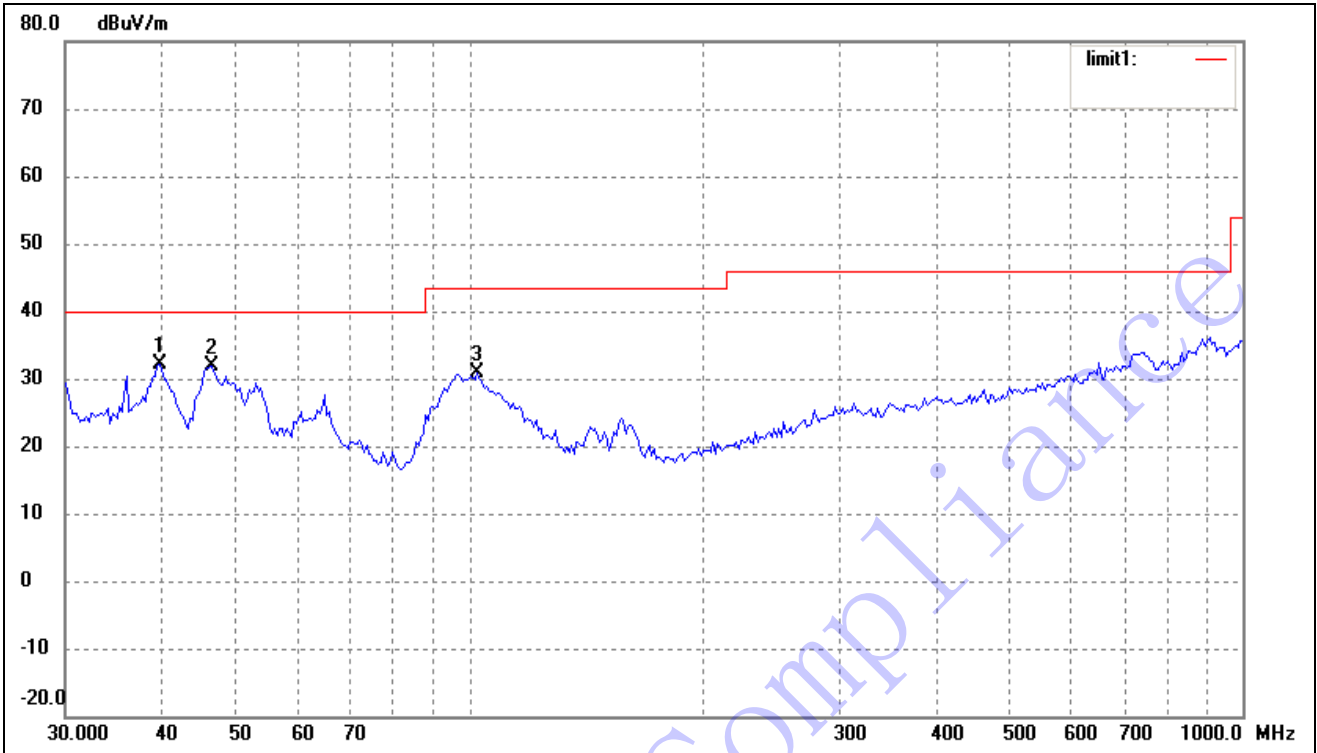

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.7147	22.53	9.64	32.17	40.00	-7.83	180	100	peak
2	46.3402	24.19	7.75	31.94	40.00	-8.06	360	100	peak
3	102.3597	24.35	6.61	30.96	43.50	-12.54	90	100	peak

EXHIBIT 1- PRODUCT LABELING

Proposed FCC Label Format

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

Specifications: Text is Black in color and is justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. Where the EUT is constructed in two or more sections connected by wires and marketed together, the above statement is required to be affixed only to the main control unit. When the EUT is so small or for such use that it is not practicable to place the statement on it, the above information shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.

Proposed Label Location on EUT

FCC Label Location



EXHIBIT 2 - EUT PHOTOGRAPHS

EUT View 1



EUT View 2



EUT Housing and Board View 1



Solder Board-Component View 1



Solder Board-Component View 2

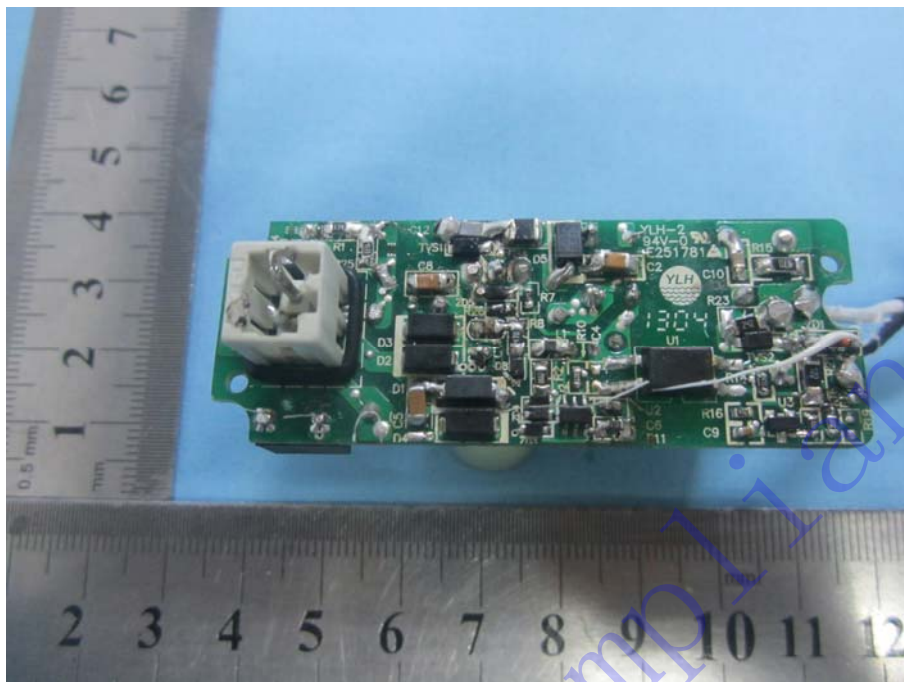


EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

Conduction Emission View



Radiation Emission View



EXHIBIT 4 - USERS MANUAL

Information to Users

According to the FCC Part 15.19, 15.21, and 15.105 rule, for this EUT, the instructions or operation manual furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

***** END OF REPORT *****